



## BAUCOAT WP PLUS

Elastomeric Acrylic Waterproof and Protective Coating

### **DESCRIPTION**

BAUCOAT WP PLUS is a single component, elastomeric, acrylic waterproofing and protective coating. Upon curing it forms a tough, flexible and durable coating which is resistant to UV and other weathering agents.

BAUCOAT WP PLUS is also used to protect exposed concrete structures against carbonation and chloride ion diffusion

### **TYPICAL USES**

Used as waterproofing and protective coating for the following structures:

- Sloped concrete roofs, metal profile roofs & asbestos roofs
- Anti-carbonation coating in car park decks
- Protective coating on underpasses & concrete bridge decks
- Protective coating on polyurethane foam insulation

### **ADVANTAGES**

- Single Component. Easy to Apply
- Protects exposed concrete structures against Carbonation and ingress of atmospheric gases and salts
- Good UV resistance
- Elastomeric -high crack bridging capability
- Good adhesion to most of the substrates
- Good resistance to dilute acids, alcohol, hydrocarbons, chloride and sulphate ions

### **TECHNICAL PROPERTIES**

Color	White (Colours available on request)
Solid Content (by wt)	55 ± 3 %
Tensile Strength (ASTM D412)	1.4 N/mm <sup>2</sup> (+/-0.2)
Elongation (ASTM D412)	250 % (+/-20)
Hydrostatic pressure @5bar (50m)	Pass
Toxicity	Non-Toxic
Crack Bridging Ability	> 0.5 mm
Application Temperature	5 to 45 Degree C
Service temperature, [°C]	-20°C to 70° C

*(The properties shown below were obtained under laboratory conditions)*

*All values given are subject to 10% tolerance)*

**APPLICATION INSTRUCTION**

Application procedures may vary slightly depending upon site conditions. The general recommended guidelines for the application of the coating are as follows:

**Surface Preparation****Concrete Surfaces**

Clean the surfaces which shall receive the coating of all dust, dirt, moss, oil and grease, loose particles, cement laitance and all other deleterious materials which will affect the adhesion of the coating with the substrate. Cracks and potholes shall be repaired with concrete repair mortar from the SPADREP\* range.

**Metal Surfaces**

Clean the surface of all rust scales. This can be achieved by wire brushing or grit blasting.

**Priming**

BAUCOAT WP PLUS shall be diluted with 20% water and applied as primer coat on the concrete surface to seal the pores and stabilize the surface.

The primer also functions as an adhesion promoter for the topcoats. This primer coat can be applied by a brush, roller or airless spray and allowed to dry completely before the application of acrylic coating.

**Application**

Mix the contents of the drum prior to the application to remove any sediment. BAUCOAT WP PLUS can be applied by soft bristled brush, roller or an airless spray.

When applying by airless spray, dilute the coating with approximately 5% water to reduce the viscosity of the coating.

Apply the first coat of undiluted material at a coverage rate of **1 kg/m<sup>2</sup>/coat** to get a Dry Film thickness of 0.5 mm.

It is important to ensure that each coat has cured completely before applying the next coat. The second coat should be applied at right angle to the first at the same coverage rate, to ensure a full unbroken coating to the substrate.

For improved strength and flexibility, embed a 65 g/m non-woven geo-textile membrane whilst the first coat is still wet on all corner joints, fillets and pipe penetration joints.

Allow the coating to cure fully for 7 days to achieve its full properties.

**PACKAGING**

BAUCOAT WP PLUS is supplied in 25 Kg Pails and 200 Kg Drum.

**COVERAGE**

1 Kg/m<sup>2</sup> at 0.5mm film thickness.

Two coats will give a combined thickness of 1.0 mm approximately.

**STORAGE & SHELF LIFE**

Store under cover, out of direct sunlight, clear of the ground on pallets and protect from extreme temperatures. In tropical climate the product must be stored in air-conditioned environment (<25°C).


Shelf life is 12 months when stored as above.

### **PRECAUTIONS**

As with all construction chemicals products caution should always be exercised. Protective clothing such as gloves and goggles shall be worn. Treat any splashes to the skin or eyes with fresh water immediately. Should any of the products be accidentally swallowed, do not induce vomiting, but call for medical assistance immediately.

There are no known health hazards associated with BAUCOAT WP PLUS.

Clean all the tools with water after use. Hardened materials can be removed mechanically only. Allow the waste to cure. Seal it into a suitable container and bury in landfill as per the local regulations.

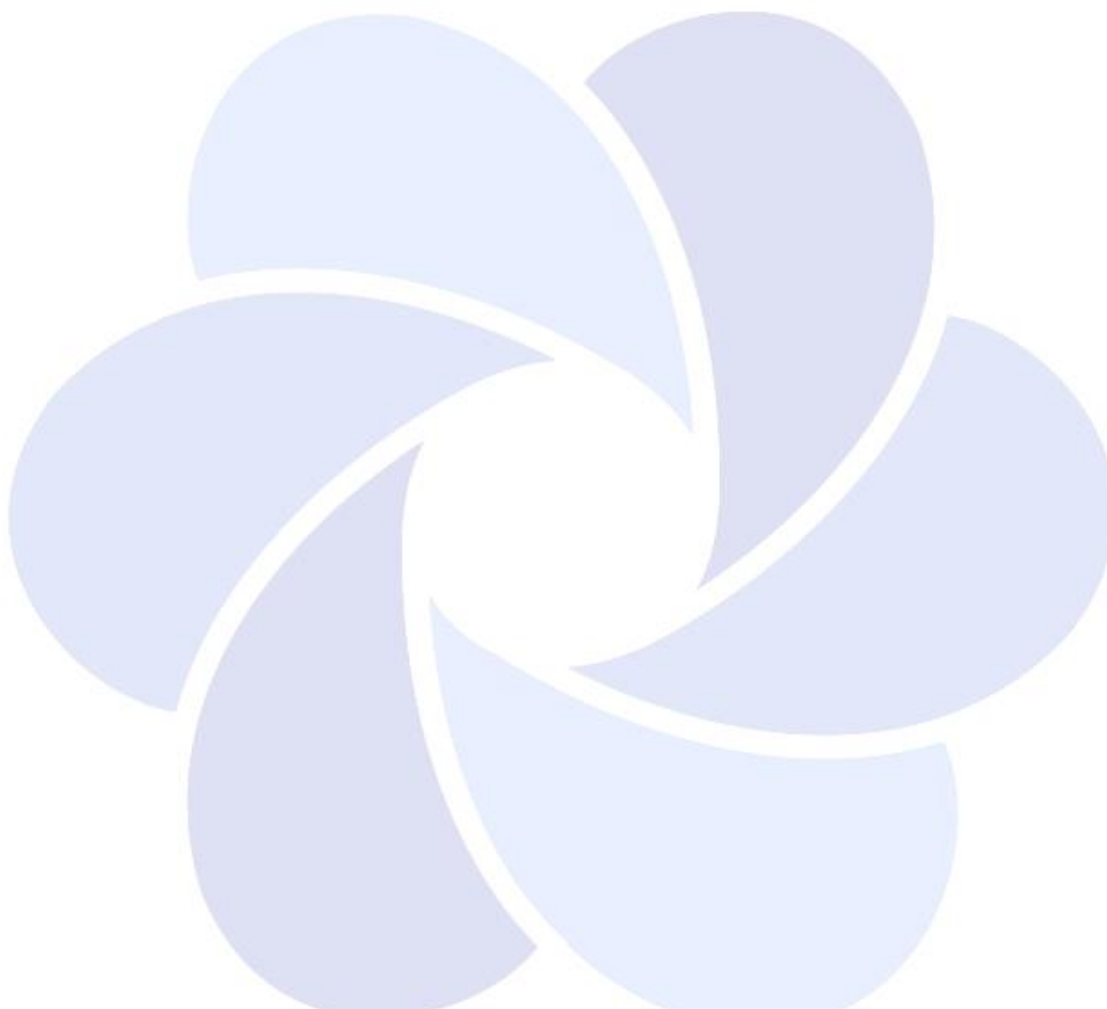

Note: Whilst any information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, as the conditions of any labor involved in the application is beyond our control. BAUTECH shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of this product. It is the responsibility of the user to ensure that the product meets his requirements and to use it in a suitable way. Field service, where provided, does not constitute supervisory responsibility. For additional Information contact your local BAUTECH representative.



**BAUTECH CHEMICAL INDUSTRIES, P.O.BOX: 23054, AJMAN, UNITED ARAB EMIRATES**  
 TEL: +9716 7441150 FAX: +9716 7441120, Email: [marketing@bautechindustries.com](mailto:marketing@bautechindustries.com)